

80kW¹ Standby Generator Liquid Propane Vapor



Briggs & Stratton® The Smart Choice

Durable backup power for businesses and luxury homes. Guard against losses due to power outages with a Briggs & Stratton® Standby Generator.



Parts • Labor • Travel
Limited
Warranty

Standard Features

- UL 2200 Listed
- Rugged seven-gauge steel base and protected by an enclosure made from Galvannealed Steel
- Generators are powered by EPA Certified 1800 RPM industrial grade PSI engine
- Sound attenuated enclosures for reduced noise output
- Marinco 6A battery charger
- DSE 7310 MKII controller
- High performance, durable alternator
- Industry leading 3 year standard limited warranty. 3 years parts, labor and travel³



Generator Set Rating

Model	Alternator Model	Voltage	Phase ²	Hz	Liquid Propane Vapor 125°C Standby Rating			Limited Warranty ³
					kW' / kVA	Amps	Circuit Breaker Amps	Parts, Labor, Travel
080005	ECP34-2L/4	120/240	1	60	80/80	333	400	3 Year
080006	ECP34-1L/4	120/208	3	60	80 / 100	277	300	3 Year
080007	ECP34-1L/4	120/240	3	60	80 / 100	240	300	3 Year
080008	ECP34-1L/4	277/480	3	60	80 / 100	120	150	3 Year
080009	ECP34-2S/4	347/600	3	60	80 / 100	96	100	3 Year

¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motors and generators).

² Single phase units are rated at 1.0 power factor and three phase units are rated 0.8 power factor

³ Warranty details available at www.briggsandstratton.com



Engine Specifications

Engine	
Manufacturer	PSI
Aspiration	Turbocharged Air Cooled
Model Type	5.7, Industrial Powertrain 4-Cycle
Speed (RPM)	1800
Cylinder Arrangement	V8
Displacement (ci / L)	350 / 5.7
Bore & Stroke (in / mm)	4.00 x 3.48 / 101.6 x 88.4
Compression Ratio	9.4:1
Governor Type	Electronic
Frequency Regulation Steady State	+/- 0.5%
Frequency Regulation No-load to Full-load	Isochronous
Air Filter Type	Dry
Warranty	3 Years
Lubrication System	
Type	Full Pressure
Oil Capacity (qt / L)	5.0 / 4.7
Oil Filter (Quantity / Type)	1 / Spin-On
Cooling System	
Heat Rejected to Cooling Water at Rated Load (BTU/min / kcal/sec)	4100 / 17.2
Water Pump Type	Centrifugal

Electrical System			
Ignition System	HVS Distributor		
Battery Quantity	1		
Battery Voltage (VDC)	12		
Battery CCA (A)	630		
Battery Charging Alternator			
Ground (Negative/Positive)	Negative		
Voltage (VDC)	12		
Amperage (A)	70		
Starter Motor Voltage (VDC)	12		
Exhaust System			
Exhaust Manifold Type	Dry		
Exhaust Flow at Rated Load (cfm / m³/min)	846 / 24		
Exhaust Temperature at Rated Load (°F / °C)	1350 / 732		
Maximum Allowable Back Pressure (in Hg / kPa)	3 / 10.2		
Fuel System			
Fuel Type	Liquid Propane Vapor		
Fuel Supply Line Inlet	1-1/4 NPT		
Recommended Fuel, Lower Heating Value Minimum (BTU/ft³ / MJ/m³)	2338 / 87.1		
Fuel Supply Pressure (in H₂O / mbar)	7-11 / 17-28		
Fuel Consumption			
	Full Load	1/2 Load	No Load
BTU/hr	765,000	445,000	162,500
ft³/hr	306	178	65
m³/hr	8.7	5	1.8
gal/hr	8.4	4.9	1.8
Engine Output Deratings			
Rated Temperature (°F / °C)	77 / 25		
Rated Altitude	1200 ft (366 m) Above Sea Level		
Temperature Derate	1.5% for Each 10°F (5.6°C) Above Rated Temperature		
Altitude Derate	2.5% for Each 1000 ft (305 m) Above Rated Altitude		
Sound Rating at 7 Meters, Lowest Side			
No Load	81 dB(A)		
Air Induction System			
Combustion Air (cfm / m³/min)	262 / 7.42		

¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motors and generators).

Additional Standard Features

Sound Enclosure

- Sound level ratings with no load: 81 dB(A)²
- Sound attenuating enclosure uses acoustic insulation that meets UL 94 HF1 flammability classification and repels moisture absorption
- Lockable, stainless steel door latches
- Critical grade silencer
- Steel enclosure standard with hinged doors

Weight & Dimensions

Assembled Weight (lbs / kg)	4125 / 1871
Overall Dimensions (in / mm)	120 x 52 x 86 / 3048 x 1321 x 2184
Packaged Weight (lbs / kg)	4295 / 1948
Packaged Dimensions (in / mm)	127 x 58 x 92 / 3226 x 1473 x 2337

Controller Features


- Heated display option
- True 3 Phase generator sensing
- Power monitoring (kW, kVA, kVAR)
- Remote communication (RS232 & RS485) provides secure and simple off site monitoring. All ports are continuously active
- Configurable inputs/outputs (9/8)
- CANBus speed sensing
- Configurable display languages
- Power save mode
- Integral PLC editor
- Flexible sender inputs
- DSE Configuration Suite PC Software
- Configurable event log (250)
- Load switching, load shedding & dummy load outputs

Available Accessories

6335	Battery Cable Lockout, NFPA 110 Compliant
6343	Battery Warmer
6350	Engine Communication Cable
6360	Emergency Stop Switch, NFPA 110 Compliant, NEMA 4X
6361	Emergency Stop Switch, NFPA 110 Compliant, With Cover
6428	Controller Communication Cable, USB-A to USB-B
6463	Battery Charger, NFPA 110 Compliant, DSE 9461-02
6464	Communication Interface, DSE 890-01
6465	Remote Annunciator, DSE 2548-01
6466	Remote Display, DSE 2510-32
6468	Remote Annunciator Kit, NFPA 110 Compliant, DSE 2548-01
6469	Silencer, Super Critical Grade
6470	Silencer, Hospital Grade
6472	AVR Communication Cable

Other Features

- Alternator Protection
- Battery Rack and Cables
- Electronic, Isochronous Governor
- Gas Fuel System (includes fuel mixer, electronic secondary gas regulator, gas solenoid valve, and flexible fuel line between the engine and the skid-mounted fuel system components)
- Integral Vibration Isolation
- Local Emergency Stop Switch
- Oil Drain Extension
- Operation and Installation Literature³
- Galvanneal Enclosure

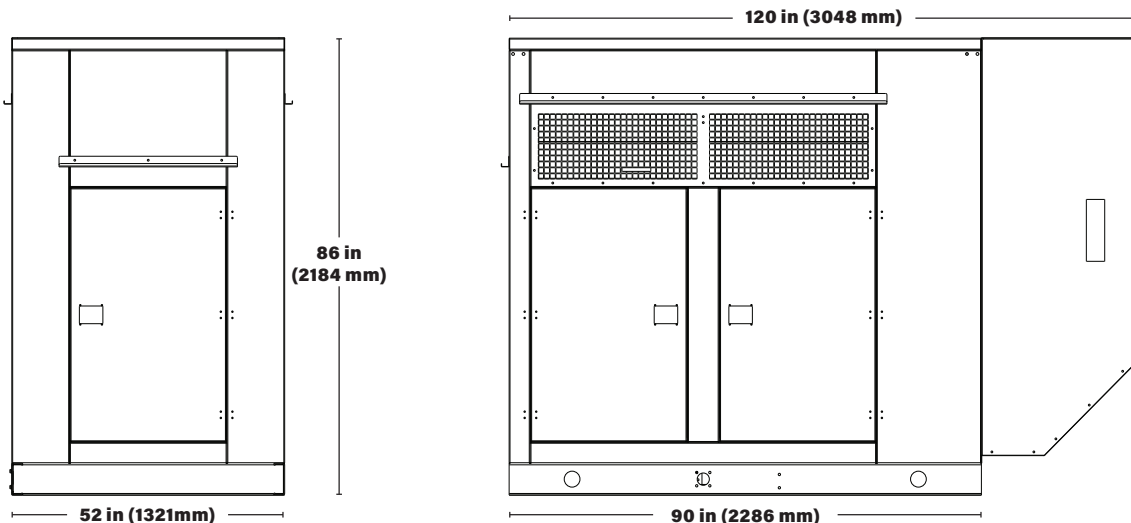

¹This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motor and generators).

²Sound measured at 7M. Sound levels at various points around generator may be higher depending on installation parameters.

³The installation manual contains specific instructions related to generator placement in addition to NFPA 37, including the requirement that carbon monoxide detectors be installed and maintained in your business and home.



80kW¹ Standby Generator
Liquid Propane Vapor

Alternator Specifications

	1 Phase	3 Phase	3 Phase	3 Phase	3 Phase
Model	080005	080006	080007	080008	080009
Alternator Model	ECP34-2L/4	ECP34-1L4	ECP34-1L/4	ECP34-1L/4	ECP34-2S/4
Manufacturer	Mecc Alte	Mecc Alte	Mecc Alte	Mecc Alte	Mecc Alte
Type	Brushless 4-Lead	Brushless, 12-Lead	Brushless, 12-Lead	Brushless, 12-Lead	Brushless, 12-Lead
Frequency (Hz)	60	60	60	60	60
Phase	1	3	3	3	3
Alternator Configuration	-	Wye	Delta	Wye	Wye
Exciter Type	Auxiliary Winding	Auxiliary Winding	Auxiliary Winding	Auxiliary Winding	Auxiliary Winding
Number of Poles	4	4	4	4	4
Voltage Regulator	Digital, 1-phase sensing	Digital, 1-phase sensing	Digital, 1-phase sensing	Digital, 1-phase sensing	Digital, 1-phase sensing
Insulation Rating	Class H	Class H	Class H	Class H	Class H
Designed Temperature Rise Limit	125°C	125°C	125°C	125°C	125°C
Bearing (Quantity / Type)	1 / Sealed	1 / Sealed	1 / Sealed	1 / Sealed	1 / Sealed
Coupling	Flexible Disk	Flexible Disk	Flexible Disk	Flexible Disk	Flexible Disk
Amortisseur Windings	Full	Full	Full	Full	Full
Voltage Regulation, NL to FL	+/- 1.0%	+/- 1.0%	+/- 1.0%	+/- 1.0%	+/- 1.0%
One Step Load Acceptance	100% of Rating	100% of Rating	100% of Rating	100% of Rating	100% of Rating
Sustained Short-Circuit Current	300% of rated current for 10 seconds	300% of rated current for 10 seconds	300% of rated current for 10 seconds	300% of rated current for 10 seconds	300% of rated current for 10 seconds
Total Harmonic Distortion (THD), NL to FL	< 2.5	< 3.5	< 3.5	< 3.5	< 3.5

- Windings are insulated using the latest vacuum pressure impregnation technologies
- 2/3rds winding pitch to eliminate triplen harmonics with the voltage waveform
- Fully programmable digital AVR with alarm memory
- Manufactured according to the following standards: UL1004, NEMA MG1, IEC 60034-1

¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motor and generators).

Briggs & Stratton has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice.

Not for Prime Power or use where standby systems are legally required, for serious life safety or health hazards, or where lack of power hampers rescue of fire-fighting operations.

BRIGGS & STRATTON CORPORATION
POST OFFICE BOX 702
MILWAUKEE, WI 53201 USA

Copyright ©2017. All rights reserved.



YOU. POWERED.